

# rtc<sup>®</sup>

COUPLING TECHNOLOGY



# 172

rtc TYPE





Temperature Range - Temperaturbereich

Nitrile (N) -20°C + 110°C (-4°F + 230°F)

Max. Working Pressure - Max. Betriebsdruck

rtc 172.06 12 bar (175 PSI)

rtc 172.08 16 bar (232 PSI)

Flow size - Nennweite

rtc type 172.06 5.5 mm

rtc type 172.08 8 mm

Material

Socket Body- Kupplungsgrundkörper	Aluminium with Plastic Cover - Messing mit Kunststoffabdeckung
Back part - Hinterteil	Zinc plated steel - Stahl verzinkt
Push Button - Knopf Drücken	AISI 420 hardened stainless steel - Gehärteter Edelstahl
Valve - Ventil	Brass - Messing
Springs - Federn	Stainless steel - Edelstahl
Seal - Dichtung	Nitrile (N)

Plug - Nippel	AISI 420 hardened stainless steel - Gehärteter Edelstahl
------------------	---

Technical Specifications


- The system perfectly fits to the ISO 4414, EN 983 safety requirements
- Plug profile perfectly fits to the ISO 6150-C-10, AFNOR C-10 NF E 49-053
- 2 stage disconnection safety feature
- Optimised Size
- Coupling and plug, the system, is anti-corrosive

Technische Spezifikationen

- Sicherheit gemäß ISO 4414, EN 983
- Stecknippel gemäß ISO 6150-C-10, AFNOR C-10 NF E 49-053
- 2 stufen Sicherheitsentriegelung
- Kompakte Bauform
- Kupplung und Nippel, sind korrosionsbeständig.



Flow Rate vs Pressure Drop Graph / Durchflussrate vs Druckabfall

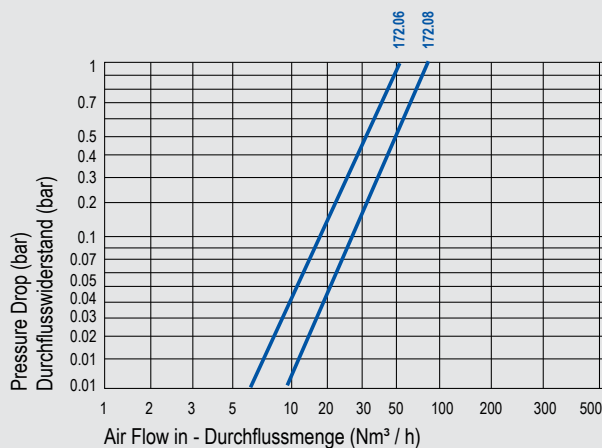

172  
rtc TYPE

**rtc** TYPE 172

Female thread socket / Kupplung mit Innengewinde



Socket / Kupplung	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	HEX.
	06	172.06 SFO 10	BSP 1/8	28	50.5	20
		172.06 SFO 13	BSP 1/4	28	53.5	20
		172.06 SFO 17	BSP 3/8	28	56.5	20
		172.06 SFO 21	BSP 1/2	28	60.5	24
		172.06 SNO 13	NPT 1/4	28	57.5	20
		172.06 SNO 17	NPT 3/8	28	58.5	20
	08	172.08 SFO 13	BSP 1/4	31	71.5	24
		172.08 SFO 17	BSP 3/8	31	71.5	24
		172.08 SFO 21	BSP 1/2	31	74.5	24
		172.08 SNO 17	NPT 3/8	31	72.5	24
		172.08 SNO 21	NPT 1/2	31	79.5	24

**rtc** TYPE 172


Male thread socket / Kupplung mit Aussengewinde



Socket / Kupplung	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	06	172.06 SMO 10	BSP 1/8	28	54.5	8	20
		172.06 SMO 13	BSP 1/4	28	56.5	10	20
		172.06 SMO 17	BSP 3/8	28	56.5	10	20
		172.06 SMO 21	BSP 1/2	28	58.5	12	22
		172.06 STO 13	NPT 1/4	28	58.5	12	20
		172.06 STO 17	NPT 3/8	28	59.5	13	20
	08	172.08 SMO 13	BSP 1/4	31	71.5	10	24
		172.08 SMO 17	BSP 3/8	31	71.5	10	24
		172.08 SMO 21	BSP 1/2	31	73.5	12	24
		172.08 STO 17	NPT 3/8	31	73.5	13	24
		172.08 STO 21	NPT 1/2	31	78.5	17	24

**rtc** TYPE 172

Standard hose tail socket / Kupplung mit gerader Standard - Schlauchtülle



Socket / Kupplung	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	L1
	06	172.06 SHO 06	6 mm	28	69.5	23
		172.06 SHO 08	8 mm	28	69.5	23
		172.06 SHO 10	10 mm	28	72.5	26
		172.06 SHO 13	13 mm	28	72.5	26
	08	172.08 SHO 08	8 mm	31	84.5	23
		172.08 SHO 10	10 mm	31	87.5	26
		172.08 SHO 13	13 mm	31	87.5	26
		172.08 SHO 16	16 mm	31	87.5	26

**rtc** TYPE 172

Socket with Plastic Hose Connection / Kupplung mit Kunststoffschlauchanschluss



Sockets / Kupplungen	Size Größe	Order No / Bestellnr.	Ød	Ød1
	06	172.06 SVOG 0610	6.5x10	28
		172.06 SVOG 0812	8x12	28
	08	172.08 SVOG 0812	8x12	31
		172.08 SVOG 1116	11x16	31



Female thread plug / Nippel mit Innengewinde

Plug / Nippel	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	HEX.
	06	170.06 PFF 10	BSP 1/8	7.5	42	14
		170.06 PFF 13	BSP 1/4	7.5	47	17
		170.06 PFF 17	BSP 3/8	7.5	50	22
		170.06 PNF 13	NPT 1/4	7.5	48	14
		170.06 PNF 17	NPT 3/8	7.5	49	17
	08	170.08 PFF 13	BSP 1/4	11	56	17
		170.08 PFF 17	BSP 3/8	11	58	22
		170.08 PFF 21	BSP 1/2	11	59	27
		170.08 PNF 17	NPT 3/8	11	58	22
		170.08 PNF 21	NPT 1/2	11	59	27



Male thread plug / Nippel mit Aussengewinde

Plug / Nippel	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	06	170.06 PMF 10	BSP 1/8	7.5	44	8	14
		170.06 PMF 13	BSP 1/4	7.5	47	11	14
		170.06 PMF 17	BSP 3/8	7.5	52	12	19
		170.06 PTF 13	NPT 1/4	7.5	47	12	14
	08	170.08 PMF 13	BSP 1/4	11	55	11	17
		170.08 PMF 17	BSP 3/8	11	57	12	19
		170.08 PMF 21	BSP 1/2	11	61	14	24
		170.08 PTF 17	NPT 3/8	11	57	12	19
		170.08 PTF 21	NPT 1/2	11	64	17	24



Standard hose tail plug / Nippel mit gerader Standard - Schlauchtülle

Plug / Nippel	Size Größe	Order No / Bestellnr.	Ød	Ød1	L	L1
	06	170.06 PHF 06	6 mm	7.5	56	23
		170.06 PHF 08	8 mm	7.5	56	23
		170.06 PHF 10	10 mm	7.5	56	23
		170.06 PHF 13	13 mm	7.5	60	26
	08	170.08 PHF 08	8 mm	11	62	23
		170.08 PHF 10	10 mm	11	62	23
		170.08 PHF 13	13 mm	11	66	26
		170.08 PHF 16	16 mm	11	66	26